
STEELMAN POWER CAPACITORS SPECIFICATION SHEET

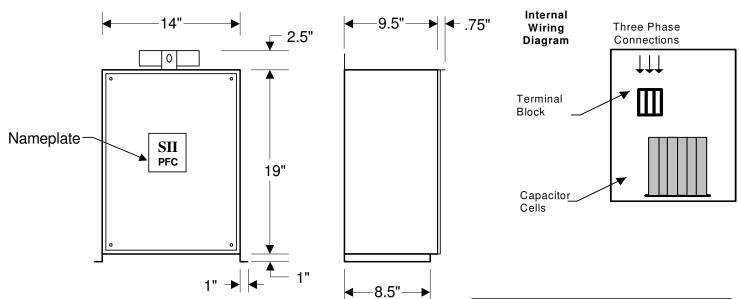

MODEL M036.0-480-NF 36 KVAR 480 VOLT Non Fused Three Phase 60 Hz NEMA 3R Enclosure Rated Current: 43.2 Amps Recommended Wire Size: 6 AWG APPROX. WEIGHT 42 LBS. EACH

OPTIONS:

- **♦** Built-In Contactor
- ♦ 3rd Leg Fusing
- ♦ Built-In Circuit Breaker

Enclosures are rated NEMA 3R, Outdoor/Indoor. Provisions for wall, pole, or floor mounting are included.

TWO YEAR LIMITED WARRANTY!

Life Expectancy: 20 years **Temperature:** -40°C to +50°C **Discharge Resistors:** Included, will reduce residual voltage to less than 50 volts in one minute after removal from service.

Pressure Sensitive Interrupter in each capacitor cell.

Self Clearing Design

STEELMAN ADVANTAGE OPTION

600Volt, 70°C rated capacitors

ENHANCES CAPACITOR LIFE & PERFORMANCE CHARACTERISTICS



STEELMAN INDUSTRIES, INC.

2800 HWY. 135 N P.O. BOX 1461 KILGORE, TEXAS 75662

PHONE: (903) 984-3061 FAX: (903) 984-1384